




1 - KM 0.00000

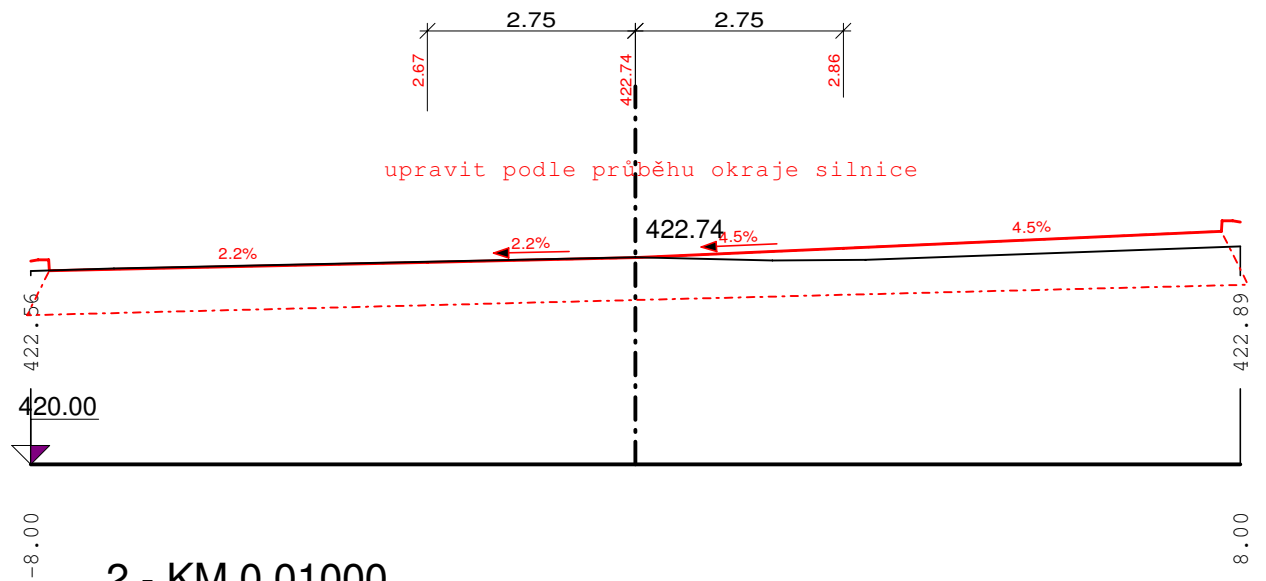


2 - KM 0.01000

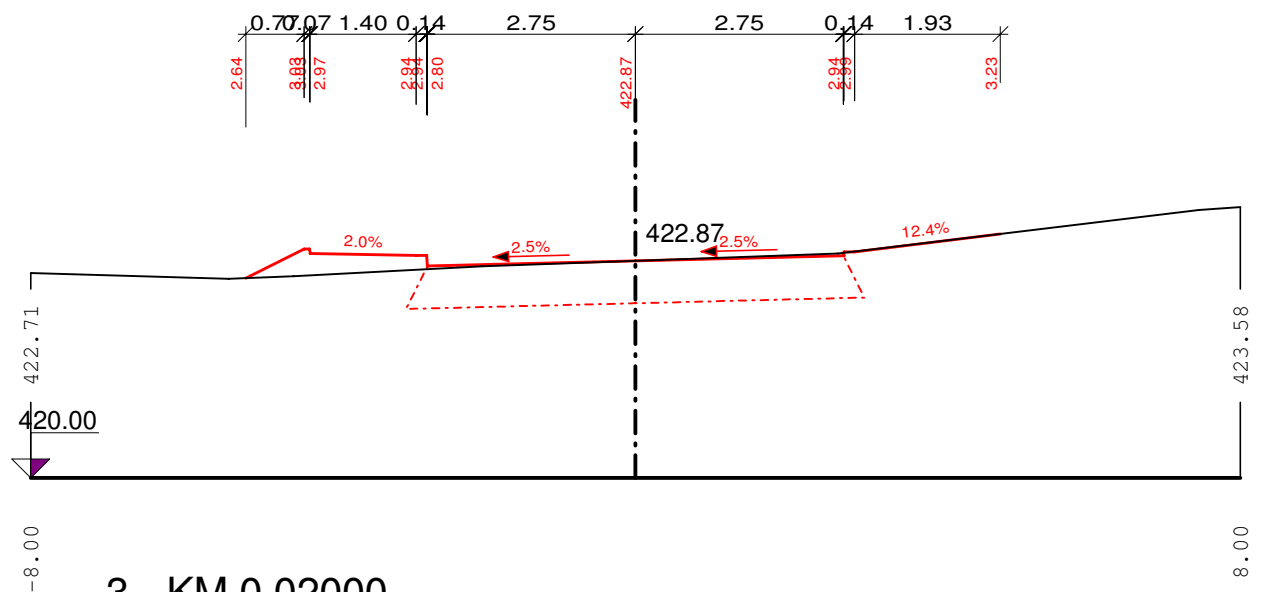


3 - KM 0.02000

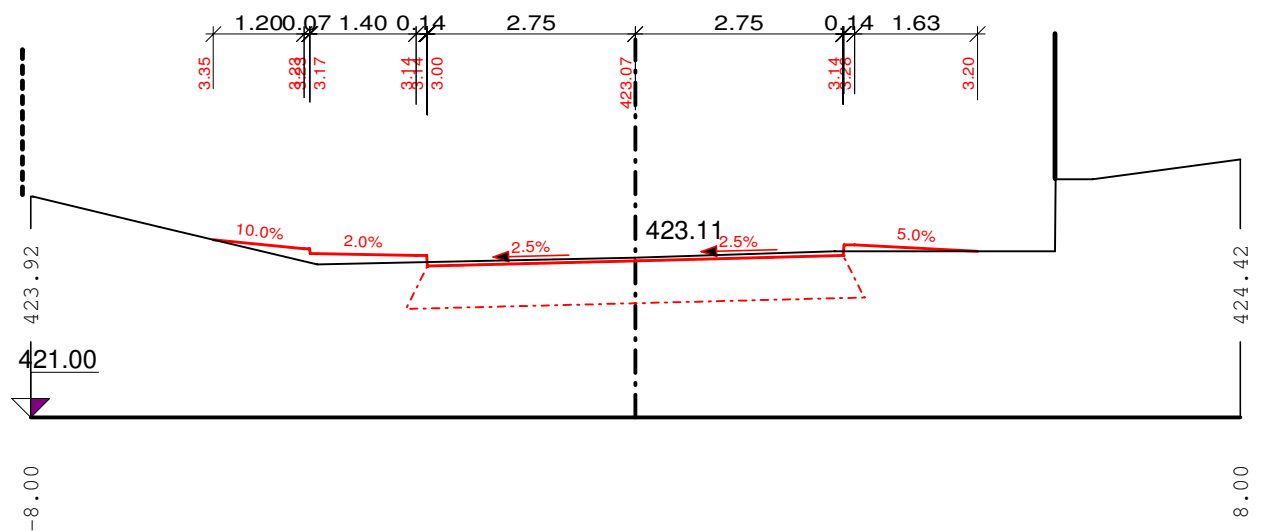


4 - KM 0.02319

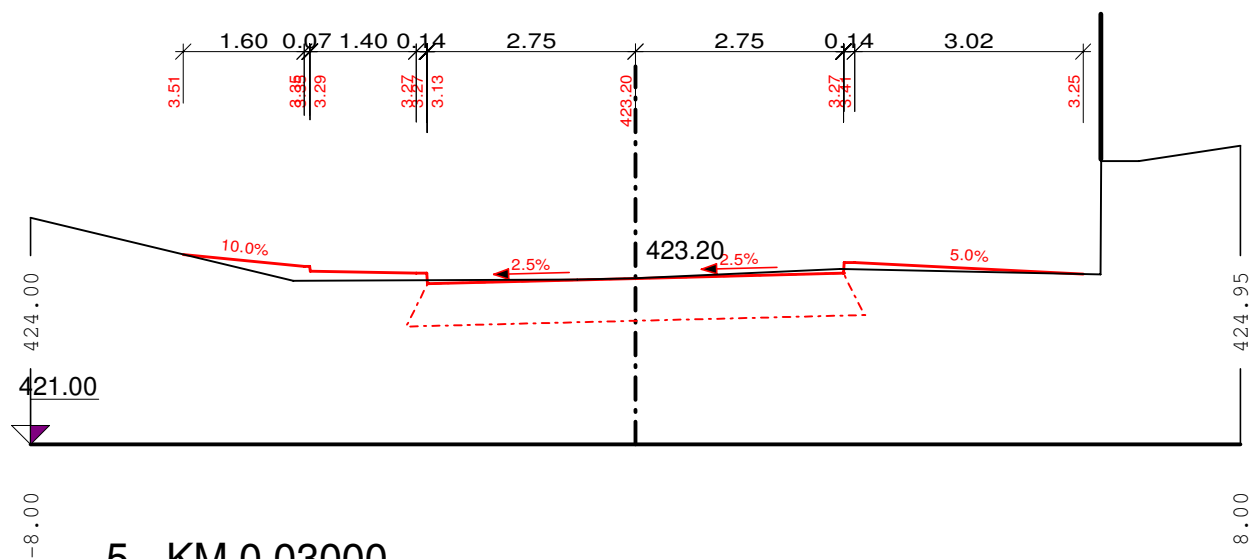


5 - KM 0.03000

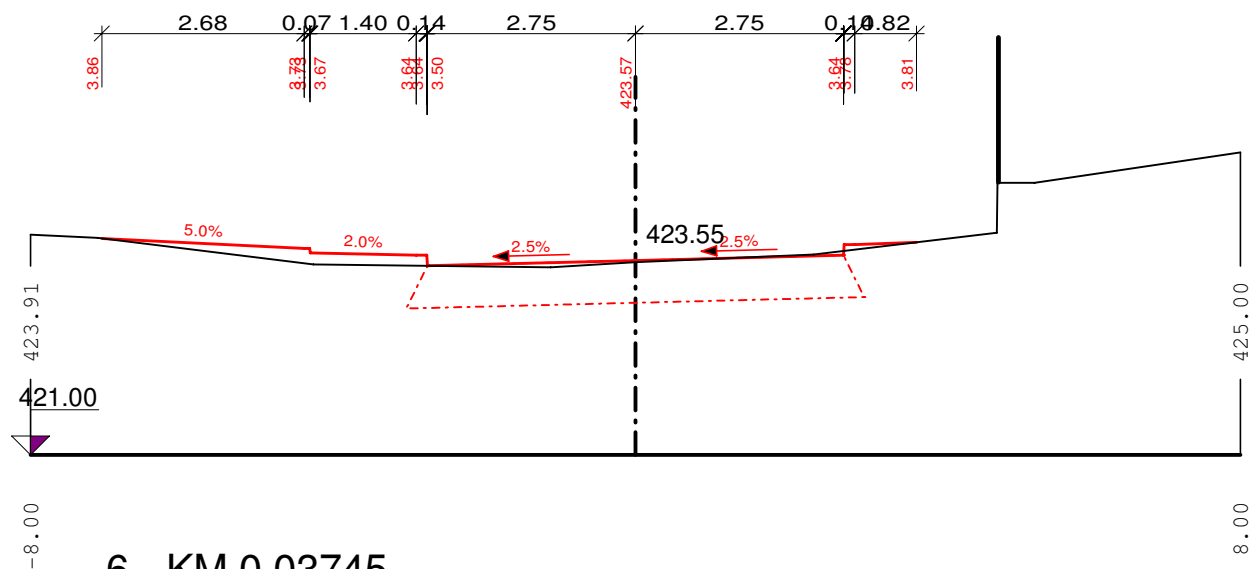


6 - KM 0.03745

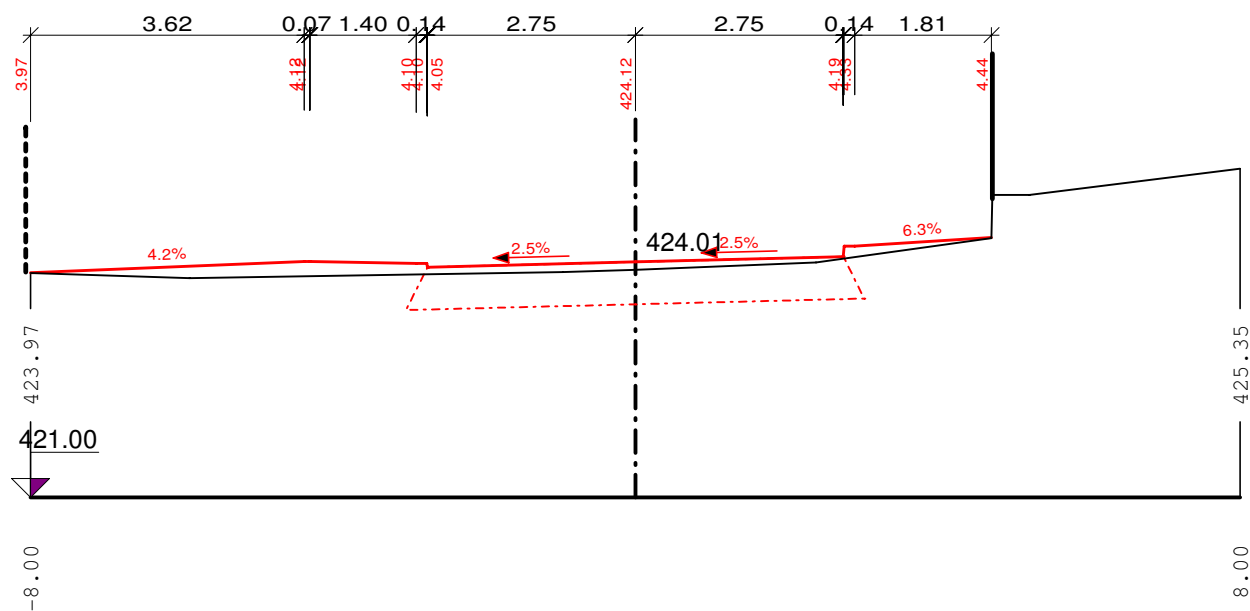


7 - KM 0.04001

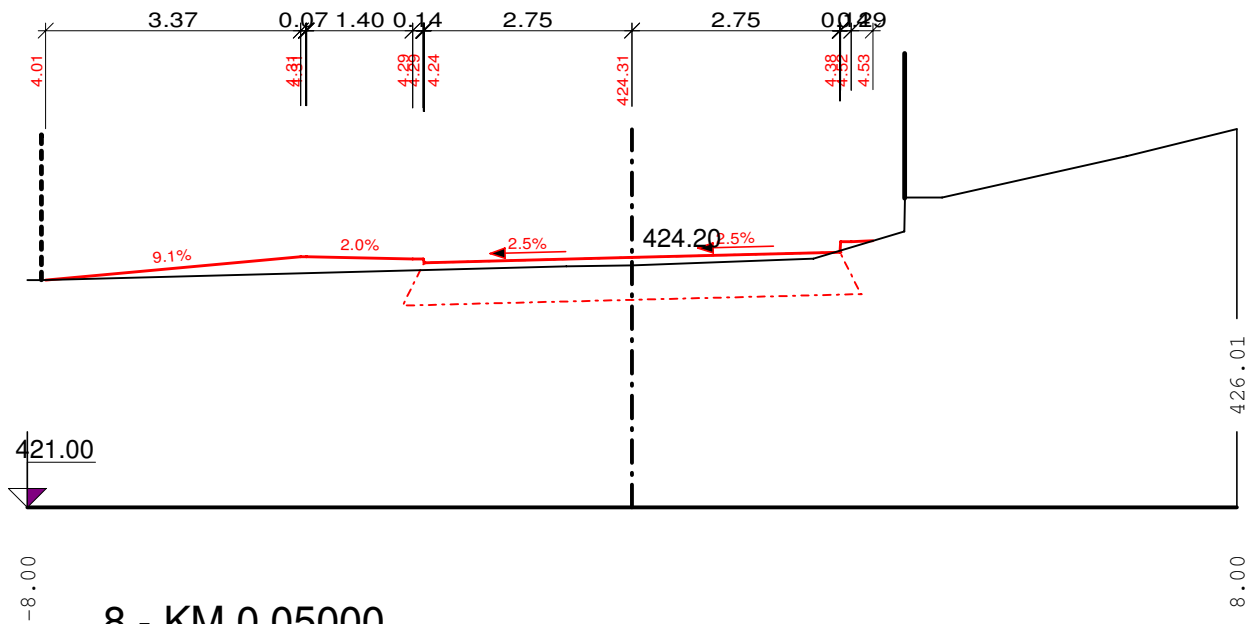


8 - KM 0.05000

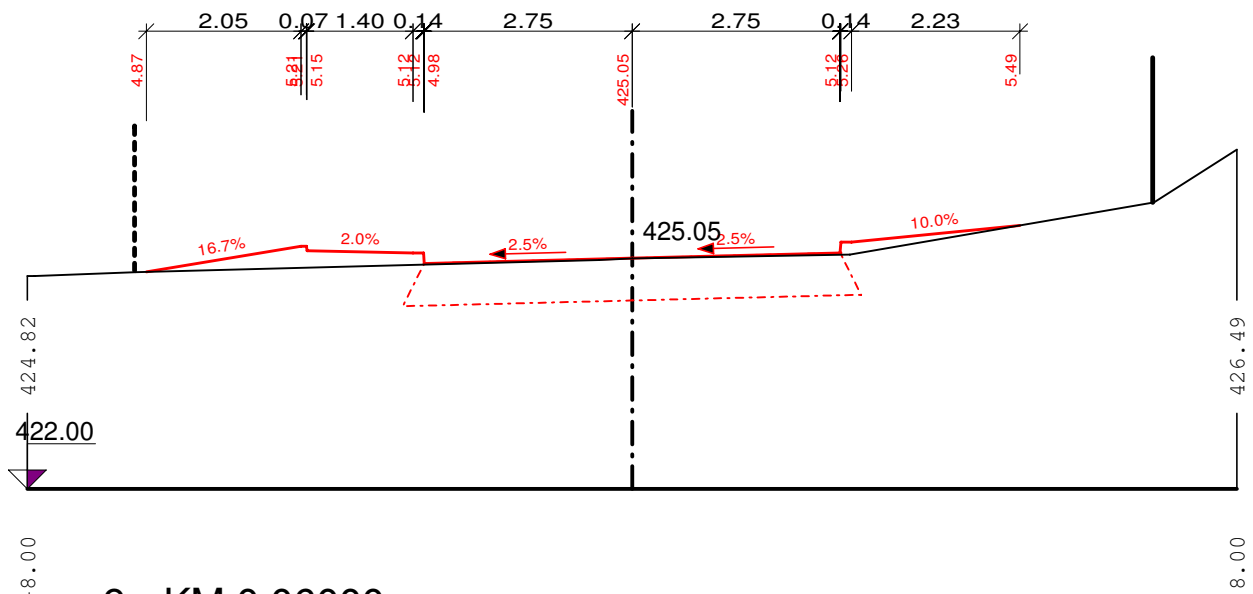


9 - KM 0.06000

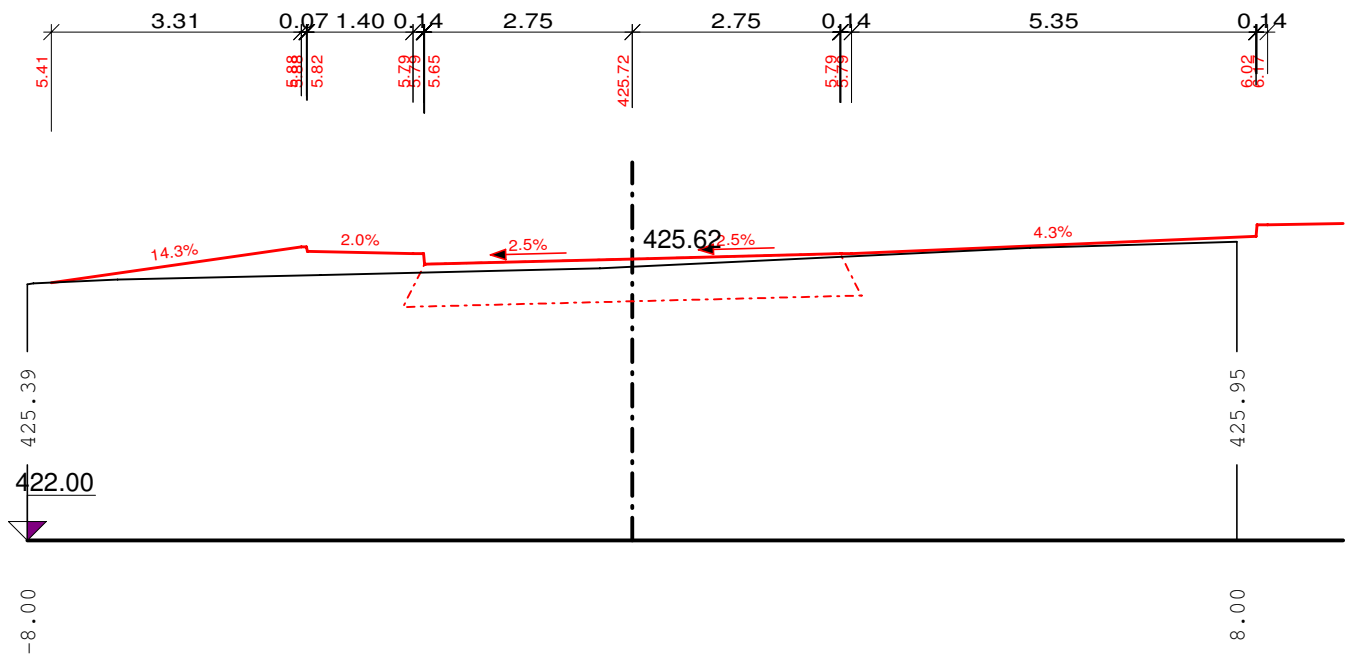


10 - KM 0.06465

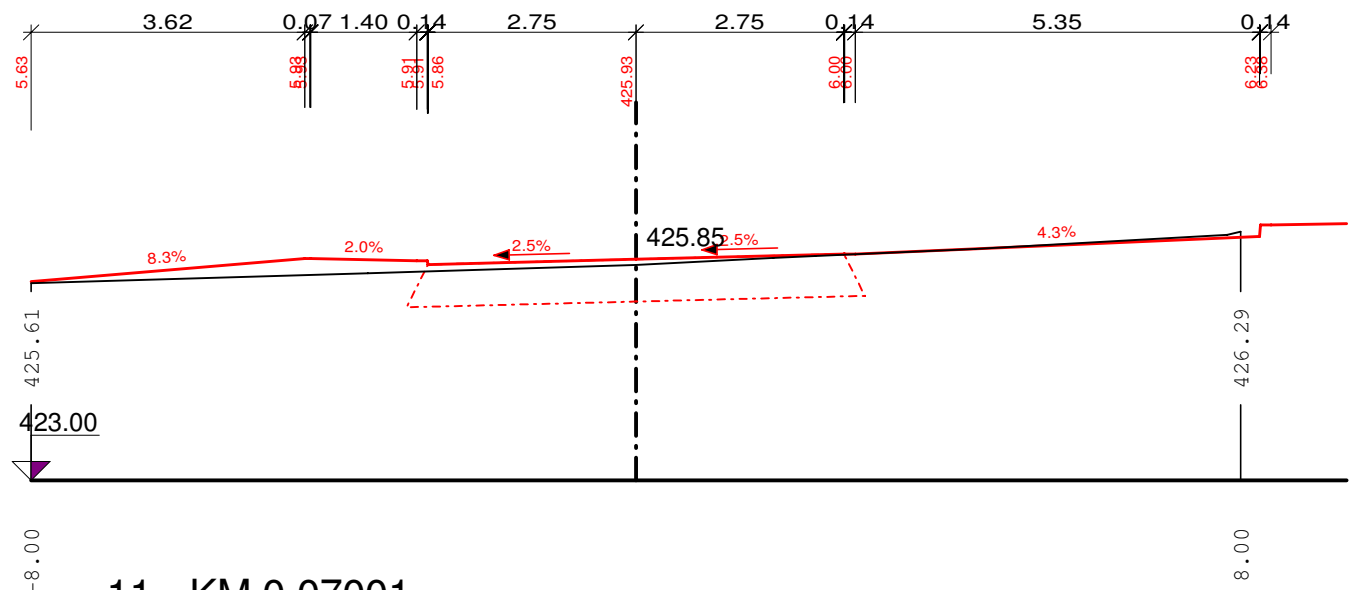

11 - KM 0.07001

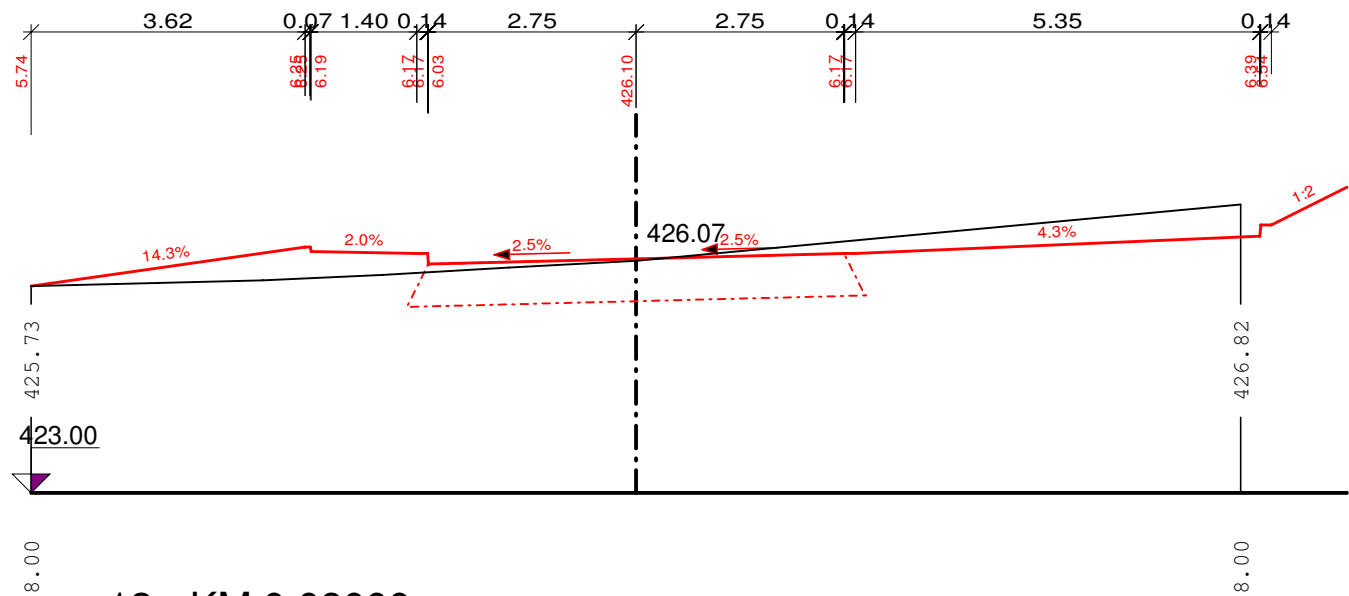

12 - KM 0.08000

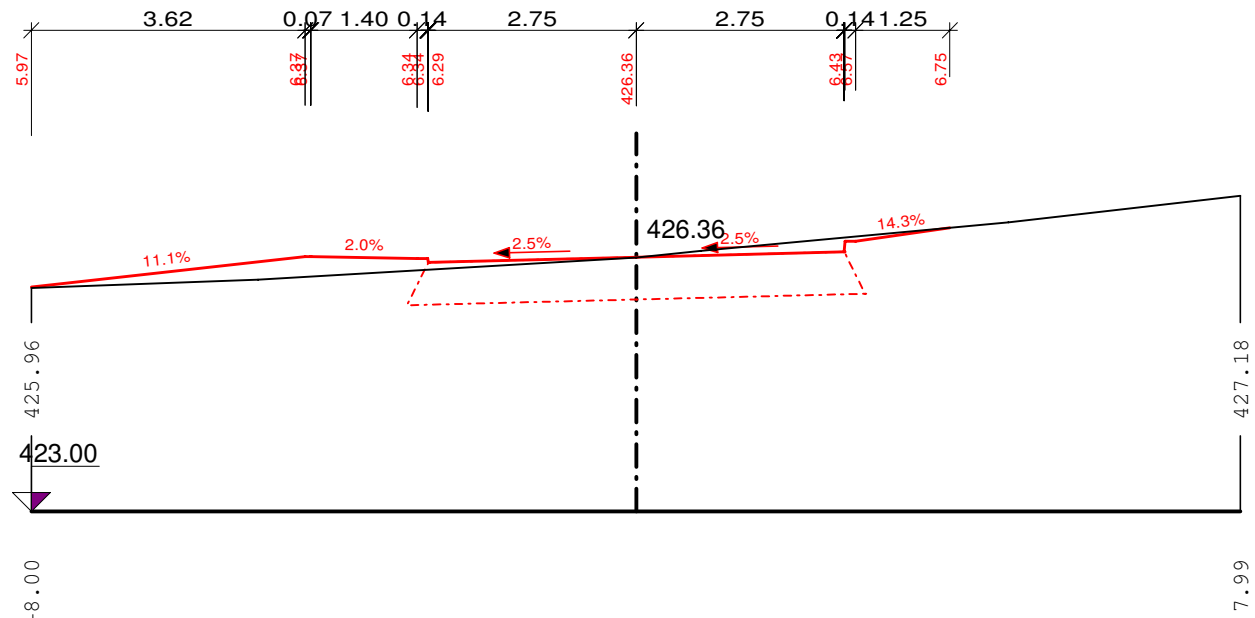


The diagram illustrates a road profile with the following details:


- Vertical Axis (Elevation):** Ranges from -8.00 to 8.00. Key elevations include 426.03 at the start, 424.00 at the base, 426.46 at the center, and 427.18 at the end.
- Horizontal Axis (Stationing):** Shows distances between points: 3.62, 0.07, 1.40, 0.14, 2.75, 2.75, 0.14, and 1.54.
- Grades:** Indicated by red arrows and percentages: 14.3%, 2.0%, 2.5%, 2.5%, and 5.0%.
- Profile Line:** A solid black line representing the road's elevation.
- Grade Line:** A red line showing the intended grades.
- Vertical Curve:** A dashed red line indicates a vertical curve section.
- Labels:** "14 - KM 0.09000" is written at the bottom left.

The diagram illustrates a cross-section of a road profile. The vertical axis shows elevations from -8.01 to 426.79. Key elevation points include 424.00 at the base level and 426.55 at the centerline. Horizontal distances are marked along the top: 3.63, 0.07, 1.40, 0.14, 2.75, 2.75, 0.14, and 1.79. Grades are indicated by red arrows: 14.3%, 2.0%, 2.5% (downward), 2.5% (upward), and 5.0%. Vertical offsets are shown in red above the profile line: 6.21, 6.73, 6.67, 6.64, 6.50, 426.57, 6.64, 6.76, and 6.69. A dashed red triangle highlights a specific area under the profile.


16 - KM 0.10504

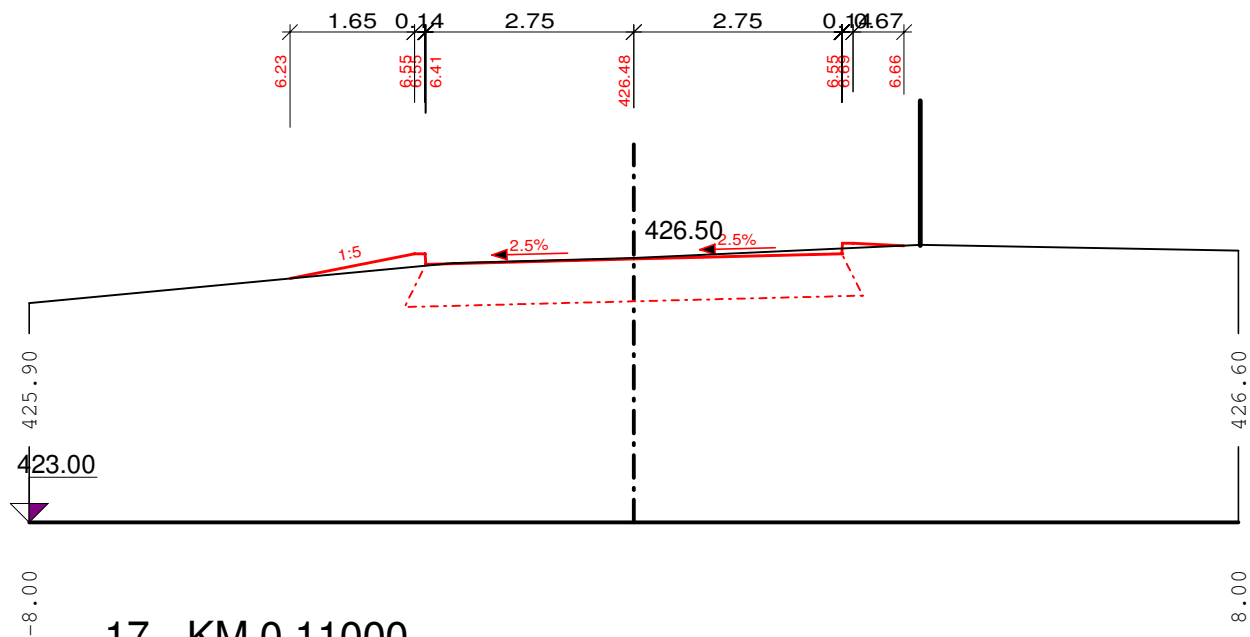


17 - KM 0.11000

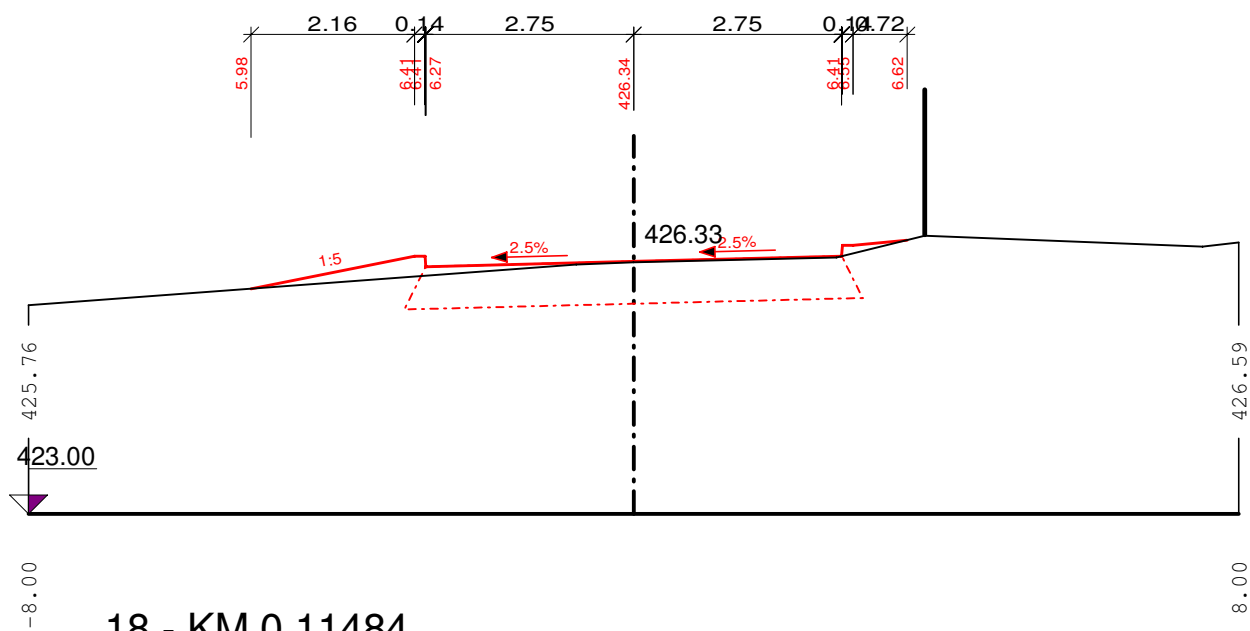

18 - KM 0.11484

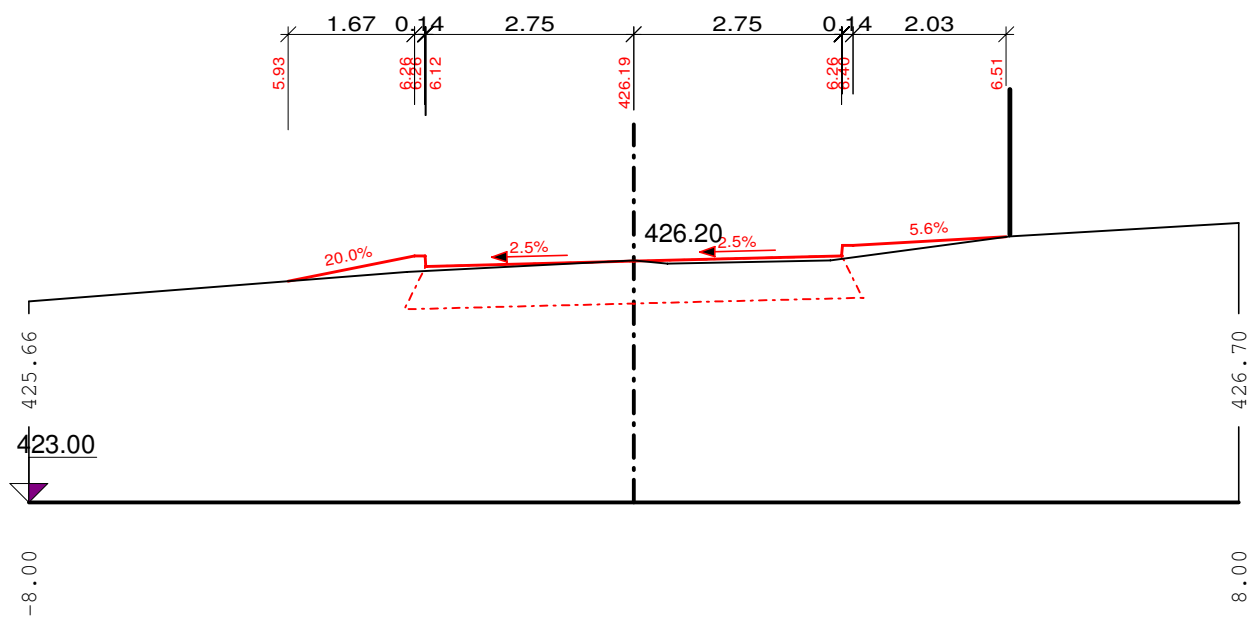

19 - KM 0.12001

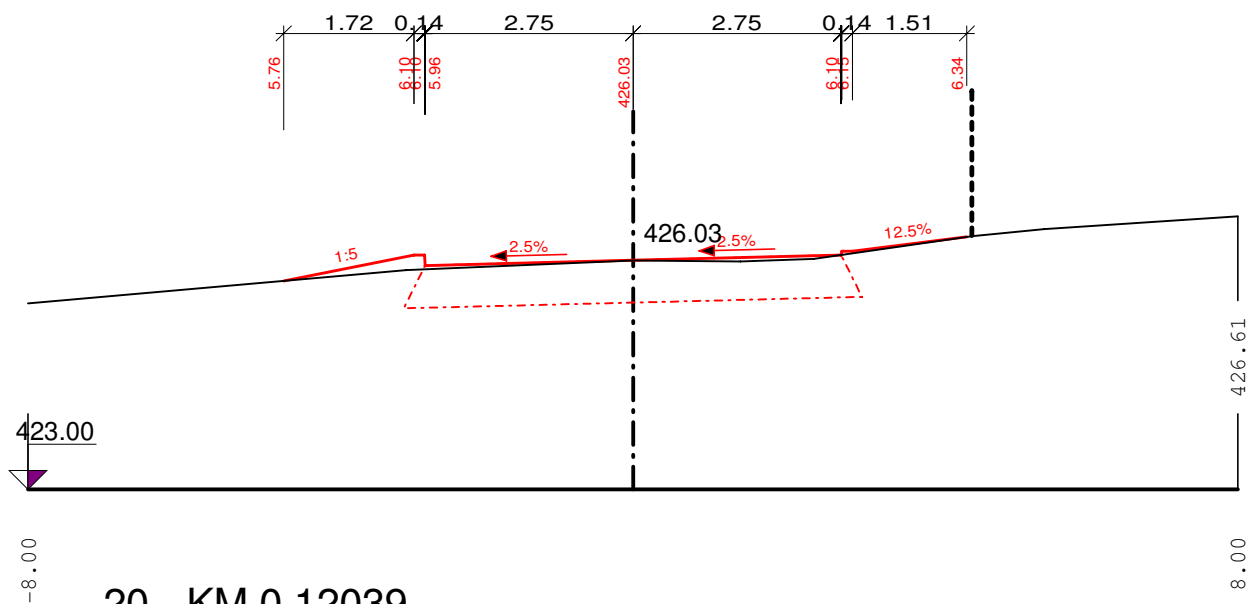

20 - KM 0.12039

